




A compact controller designed to monitor and intelligently control pressure, utilising variable speed control to adjust the pressuriser airflow output. Configurable pressure setpoints and low-pressure alerts to ensure efficient operation of the air quality system, and advising the user of compromised air quality conditions.

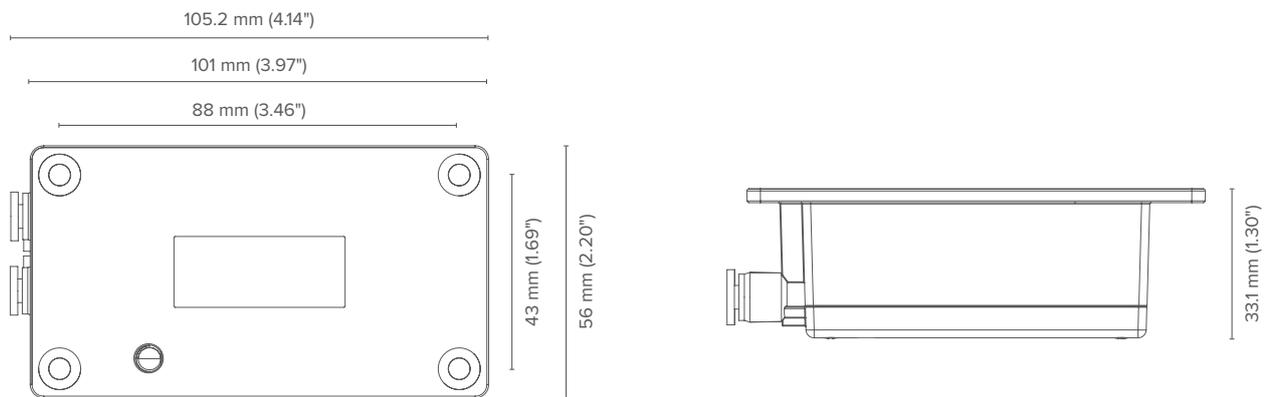

Technical Data

Detail	Description
Part Number	200467
Outer Dimensions (LxWxH)	101 x 56 x 33.1 mm (3.97 x 2.20 x 1.30")
Mounting Locations (LxW)	88 x 43 mm (3.46 x 1.69") Holes suit M4 counter-sunk bolts (x4)
Weight	164 g (0.36 lb)
Display Type	2 x 8 Character LCD Display with LED Backlight
Pressure Sensor Type	Differential Pressure
Pressure Sensor Output	-2000 Pa to +2000 Pa
Pressure Sensor Accuracy	+/- 1%
Average Current Consumption	35 mA
Peak Current Consumption	70 mA
Operating Temperature	0°C - 70°C (32°F - 158°F)
Operating Voltage	12 VDC to 28 VDC
Input Connector	DT04-2P Input Power
Output Connector	DT06-3S Output Power (Motor)